

Compact and Versatile Xedge Chassis for Packet-Based Applications

Xedge 6002 Chassis

The Xedge 6002 is a modular, compact 1RU (1.75" high) chassis ideal for central offices, remote offices, and cell sites. Chassis midplane provides two slots for one or two packet-based Xedge slot controllers that install easily via the front panel:

- Xedge PCX (Xedge Packet Cell Switch) module
- Xedge PCE (Packet Circuit Emulation) module
- Xedge PCL (Packet Cell Link) module
- Xedge ISG2, ISG3 (IP Services Gateway) modules


The ISG2 or ISG3 can also be deployed with one other compatible Xedge controller to support voice functionality, LCE-16 LIMs, or ATM transport.

Reliable and Versatile

The Xedge 6002 is a low density, rack-mountable chassis designed for the space limitations of remote cabinets or Central Offices. The shelf is equipped with an integrated 100 to 240 VAC power supply which employs universal AC input. The midplane connector supports several types of LIM Personality modules (LPMs) that allow capable slot controllers to support various LIM-type combinations.

Features & Benefits

- Compact, modular 1RU chassis installs in an open or standard 19-inch rack or cabinet, either flush-mount or midmount.
- Accommodates one double-width or two single-width slot controllers for multiservice packet applications.
- When deployed with ISG2 or ISG3, supports one Xedge CE (Circuit Emulation) module, Xedge Voice Service (VSM) module or Xedge ATM controller modules (ACP) and associated LIMs.
- Modules can be installed or extracted without powering down the shelf (hot-swappable).
- Uses one auto-ranging power supply that adapts to AC power inputs ranging from 90 to 264 VAC.
- Rear panel slots accommodate one or two Xedge line interface modules associated with the installed slot controller (PCX, PCE, PCL, CE or ACP).
- Supports environmental status and alarms control.
- Provide a signal and chassis ground connection point.
- Front panel modular craft port support capable devices.

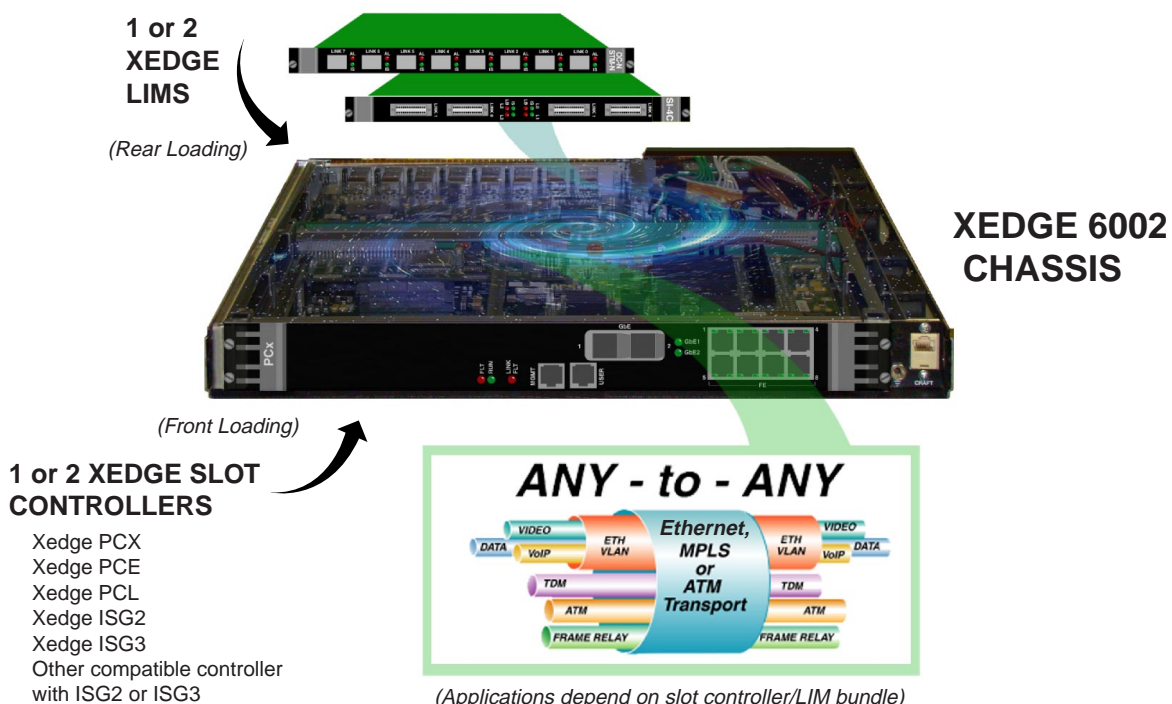

- 1 or 2 XEDGE SLOT CONTROLLERS**
- Xedge PCX
 - Xedge PCE
 - Xedge PCL
 - Xedge ISG2
 - Xedge ISG3
 - Other compatible controller with ISG2 or ISG3

Xedge 6002 Physical Specifications

Dimensions

Height: 1.74 in. (44.09 mm)
 Width: 19 in. (482.60 mm)
 Depth: 19 in. (482.60 mm)

Module Capacity

Two front slots accept up to two single-width Xedge slot controllers, or one double-width slot controller with 1 or two compatible LIMs.

Single-width slot controller modules:
 ISG2, ISG3

Dual-width slot controller modules:
 PCX, PCE, PCL

Factory-installed Link Personality Modules (LPMs):
 LPM-1, LPM-2, LPM-4, LPM-CE

Module/LIM Applications

The Slot Controller/LPM/LIM Bundle installed at the factory supports a variety of LIM applications:

PCL with LPM-1: Uses Utopia-type LIMs only

PCE with LPM-CE: Uses Utopia-type LIMs only

PCX with LPM-1: Uses Utopia-type LIMs only

PCX with LPM-2: Uses one Utopia, one SERDES-type LIMs

PCX with LPM-4: Uses SERDES-type LIMs only

LIM Types

Supported LIMs	LIM Type	Used with
STM-N/OC-N 8-Port OC-N	SERDES	PCX
155-Series LIM	Utopia	PCX
DS3	Utopia	PCX, PCL
DS1	Utopia	PCX
E1	Utopia	PCX
E3	Utopia	PCX, PCL
HSSI	Utopia	PCX
Serial I/O	Utopia	PCX
LCE-16	Utopia	PCX
DSX1-16 IMA+	Utopia	PCL
E1-16 IMA+	Utopia	PCL
DSX1-16 IMA	Utopia	PCX
E1-16 IMA	Utopia	PCX

Environmental Specifications

Non-Operating

Temperature -40 deg. to 158 deg. F (-40 deg. to 70 deg. C)
 Altitude: 0 ft. to +40,000 ft. (0 m to +12191 m)

Operating

32 deg. to 122 deg. F (0 deg. to 50 deg. C)
 Relative Humidity: 5% - 95% non-condensing
 Altitude: 0 ft. to +10,000 ft. (0 m to +3048 m)

Power Specifications

Power Supply

Capacity: One AC Power Module

Supported slots: 2

Power Requirements:
 100/120VAC, 50/60 Hz
 220/240VAC, 50/60 Hz

Fusing: 1.6A Fast Blow, 250V

Maximum Power Consumption: 150

Compliance & Compatibility

CISPR 22 Class A, FCC 15 Class A, EN55022, EN55024
 UL Listed (60950)
 c-UL Listed (CSA C22.2 #950)
 TUV licensed (EN60950)
 CE Mark
 Quality Assurance: ISO 9001: 2000 Certified

